

COMMERCIAL/INDUSTRIAL

• **Final color selection should be made from actual color chips.**

- For the most current information available, visit our website at www.mbc.com.
- See product selection chart for gauge and color availability.
- All products available in smooth or embossed finish.
- Trim available in all colors.
- A 40-year limited paint warranty is available upon written request for all colors except for Crimson Red, Polar White and Brite Red. Please review our sample warranty for complete performance attributes and terms and conditions.

SIGNATURE® 200 STANDARD COLORS 26-GAUGE MATERIAL

Siliconized Polyester
Polar White is a Straight Polyester.










* Also available in 29-gauge

				
HAWAIIAN BLUE* SR .32 SRI 35	CRIMSON RED* SR .33 SRI 34	FERN GREEN* SR .28 SRI 29	BURNISHED SLATE* SR .28 SRI 29	POLAR WHITE* SR .58 SRI 69
				
ASH GRAY* SR .48 SRI 56	SADDLE TAN* SR .48 SRI 56	DESERT SAND* SR .42 SRI 48	KOKO BROWN* SR .28 SRI 30	SOLAR WHITE** SR .74 SRI 91
				
CHARCOAL GRAY* SR .28 SRI 30	COBALT BLUE* SR .28 SRI 27	RUSTIC RED* SR .36 SRI 40	LIGHT STONE* SR .50 SRI 58	

SIGNATURE® 300 STANDARD COLORS 26-GAUGE MATERIAL PBR, PBU, PBA, PBC, PBD PANELS ONLY

KYNAR 500®, HYLAR 5000®, Low Gloss

* Also available in 24-gauge

				
MEDIUM BRONZE* SR .33 SRI 36	SNOW WHITE* SR .65 SRI 79	SLATE GRAY* SR .37 SRI 41	ALMOND* SR .63 SRI 76	BONE WHITE** SR .70 SRI 85
				
CLASSIC GREEN* SR .28 SRI 30	BROWNSTONE* SR .47 SRI 54	BRITE RED* SR .49 SRI 55	HARBOR BLUE* SR .28 SRI 30	

** Minimum quantities and/or extended lead times may be required. Please inquire.

Signature® is a registered trademark of NCI Group, Inc. KYNAR 500® is a registered trademark of Arkema, Inc. HYLAR 5000® is a registered trademark of Solvay Solexis.

COLOR CHART



3535 Shiloh Road | Tyler, TX 75707
Phone: 800.442.8979 | Fax: 903.561.7686 | www.tylerbuilding.com



* ENERGY STAR® Qualified

SOLAR REFLECTIVITY (SR)?

Solar reflectivity or reflectance (SR) is the ability of a material to reflect solar energy from its surface back into the atmosphere. The SR value is a number from 0 to 1.0. A value of 0 indicates that the material absorbs all solar energy and a value of 1.0 indicates it is all reflected. Energy Star requires SR testing of both new and aged roof products. New products must have an SR value of 0.25 or higher for steep slope (above 2:12) roofing and an SR value of 0.65 or higher for low slope (2:12 or less) roofing. Aged testing takes 3 years to complete, so not all products that meet the initial requirements are qualified. For more information, please go to www.energystar.gov.




SOLAR REFLECTANCE INDEX (SRI)?

The SRI is used to determine compliance with LEED requirements and is calculated according to ASTM E 1980 using values for reflectance and emissivity. Emissivity is a material's ability to release absorbed energy. To meet LEED requirements, a roofing material must have an SRI of 29 or higher for steep slope (above 2:12) roofing and an SRI value of 78 or higher for low slope (2:12 or less) roofing. For more information, please go to www.usgbc.org.


PANEL PROFILE	Panel	29 GAUGE		26 GAUGE		24 GAUGE		22 GAUGE	
		Galvalume Plus	Sig 200	Galvalume Plus	Sig 200	Galvalume Plus	Sig 200	Galvalume Plus	Sig 200
 "PBR" PANEL	PBR	●	■	●	■	●	■	●	■
 "PBU" PANEL	PBU	●	■	●	■	●	■	●	■
 "PBC" PANEL	PBC	●	■	●	■	●	■	●	■
 "PBD" PANEL	PBD	●	■	●	■	●	■	●	■
 7.2 PANEL	7.2	●	■	●	■	●	■	●	■
 AVP	AVP	●	■	●	■	●	■	●	■

● Available in any quantity ■ May require minimum quantity

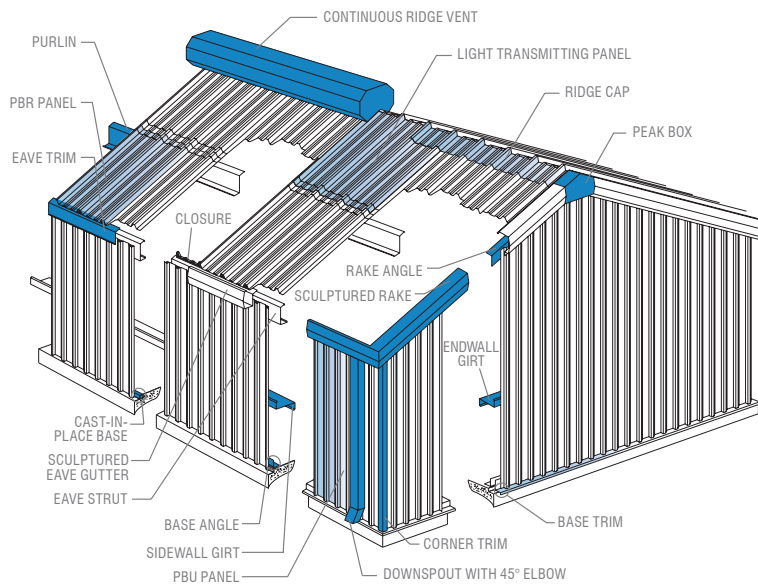

AVAILABLE ACCESSORIES

- Hat and Channel Sections
- Light Transmitting Panels
- Vents
- Roof Jacks
- Fasteners
- Ridge Caps
- Closures
- Doors
- Windows
- Sealants
- Insulation
- Bracing
- Bolts
- Louvers
- Sliding Door Hardware

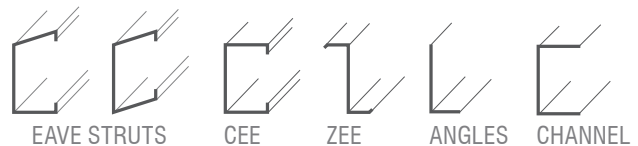

For complete performance specifications, product limitations and disclaimers, please consult MBCI's Paint and Galvalume Plus® warranties. Upon receipt of payment in full, these warranties are available upon request for all painted or Galvalume Plus®, prime products. Sample copies can be found at www.mbcicom or contact your local MBCI Sales Representative.