

# COMMERCIAL/INDUSTRIAL

- **Final color selection should be made from actual color chips.**
- For the most current information available, visit our website at [www.mbc.com](http://www.mbc.com).
- See the product selection chart for gauge and finish availability.
- All products are available in smooth or embossed finish.
- Trim is available in all colors.
- Review the sample warranty for complete performance attributes and terms and conditions.

## SIGNATURE® 200

STANDARD COLORS  
26- AND 24-GAUGE MATERIAL

### Siliconized Polyester

Polar White is a Straight Polyester.

\* Also available in 29-gauge

\*\* Minimum quantities and/or extended lead times required for 24-gauge. Please inquire.



HAWAIIAN BLUE\*\* ★  
SR .31 SRI 31



CRIMSON RED\*\* ★  
SR .32 SRI 33



FERN GREEN\*\* ★  
SR .29 SRI 29



BURNISHED SLATE\*\* ★  
SR .34 SRI 36



ASH GRAY ★  
SR .45 SRI 50



SADDLE TAN ★  
SR .47 SRI 53



DESERT SAND ★  
SR .42 SRI 47



KOKO BROWN ★  
SR .35 SRI 37



CHARCOAL GRAY\*\* ★  
SR .38 SRI 41




COBALT BLUE\*\* ★  
SR .26 SRI 24




RUSTIC RED ★  
SR .37 SRI 39



LIGHT STONE ★  
SR .56 SRI 66



POLAR WHITE\* ★  
SR .58 SRI 68



SOLAR WHITE\*\* ★  
SR .71 SRI 86

## SIGNATURE® 300

STANDARD COLORS  
26-GAUGE MATERIAL  
PBR, PBU, AVP, PBC, PBD  
PANELS ONLY


\* Also available in 24-gauge

\*\* Minimum quantities and/or extended lead times required for 24-gauge. Please inquire.

† Minimum quantities and/or extended lead times required for all gauges. Please inquire.



MEDIUM BRONZE\* ★  
SR .33 SRI 34



SNOW WHITE\* ★  
SR .65 SRI 78



SLATE GRAY\*\* ★  
SR .37 SRI 39



ALMOND\* ★  
SR .63 SRI 75



CLASSIC GREEN\*\* ★  
SR .27 SRI 26




BROWNSTONE\* ★  
SR .47 SRI 53



BRITE RED † ★  
SR .49 SRI 55



HARBOR BLUE\*\* ★  
SR .28 SRI 27



BONE WHITE\*\* ★  
SR .70 SRI 85



\* ENERGY STAR® Qualified



## SOLAR REFLECTIVITY (SR)

Solar reflectivity or reflectance (SR) is the ability of a material to reflect solar energy from its surface back into the atmosphere. The SR value is a number from 0 to 1.0. A value of 0 indicates that the material absorbs all solar energy and a value of 1.0 indicates it is all reflected. ENERGY STAR® requires SR testing of both new and aged roof products. New products must have an SR value of 0.25 or higher for steep slope (above 2:12) roofing and an SR value of 0.65 or higher for low slope (2:12 or less) roofing. Aged testing takes three years to complete, so not all products that meet the initial requirements are qualified. For more information, please visit [www.energystar.gov](http://www.energystar.gov).




## SOLAR REFLECTANCE INDEX (SRI)

The SRI is used to determine compliance with LEED requirements and is calculated according to ASTM E 1980 using values for reflectance and emissivity. Emissivity is a material's ability to release absorbed energy. To meet LEED requirements, a roofing material must have an SRI of 29 or higher for steep slope (above 2:12) roofing and an SRI value of 78 or higher for low slope (2:12 or less) roofing. For more information, please visit [www.usgbc.org](http://www.usgbc.org).


PANEL PROFILE	Panel	29 GAUGE			26 GAUGE			24 GAUGE			22 GAUGE		
		Galvalume Plus	Sig 200	Sig 300	Galvalume Plus	Sig 200	Sig 300	Galvalume Plus	Sig 200	Sig 300	Galvalume Plus	Sig 200	Sig 300
 "PBR" PANEL	PBR	●	■	●	●	●	●	■	■	●	■	■	
 "PBU" PANEL	PBU	●	■	●	●	●	●	■	■	●	■	■	
 "PBC" PANEL	PBC	●	■	●	●	●	●	■	■	●	■	■	
 "PBD" PANEL	PBD	●	■	●	●	●	●	■	■	●	■	■	
 7.2 PANEL	7.2	●	■	●	■	■	●	■	■	●	■	■	
 "AVP" PANEL	AVP	●	■	●	●	●	●	■	■	●	■	■	

● Available in any quantity    ■ May require minimum quantity

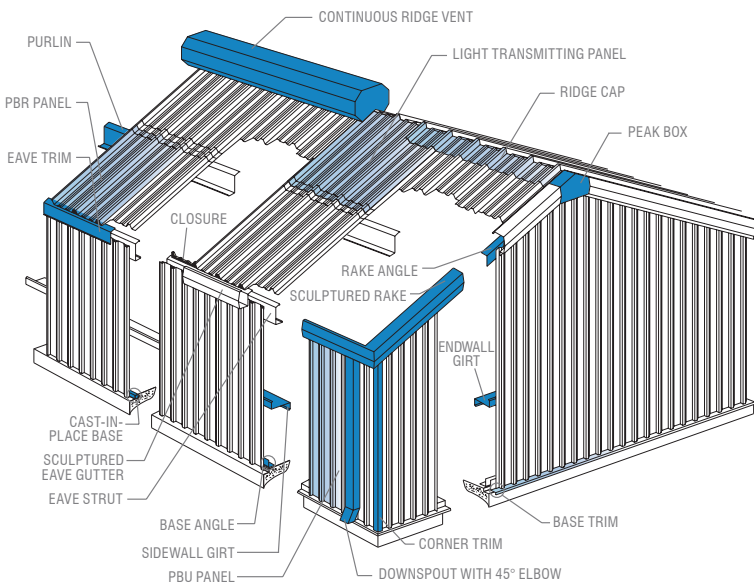

## AVAILABLE ACCESSORIES

- Hat and Channel Sections
- Light Transmitting Panels
- Vents
- Roof Jacks
- Fasteners
- Ridge Caps
- Closures
- Doors
- Windows
- Sealants
- Insulation
- Bracing
- Bolts
- Sliding Door Hardware

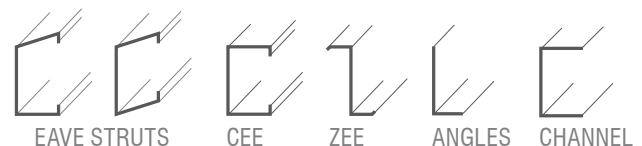

Descriptions and specifications contained herein were in effect at the time this publication was approved for printing. In a continuing effort to refine and improve products, MBCI reserves the right to discontinue products at any time or change specifications and/or designs without incurring obligation. To ensure you have the latest information available, please inquire or visit our website at [MBCI.com](http://MBCI.com).

**FOR THE MOST CURRENT INFORMATION AVAILABLE, VISIT OUR WEBSITE AT [WWW.MBCI.COM](http://WWW.MBCI.COM)**

Houston, TX | 877.713.6224  
 Adel, GA | 888.446.6224  
 Atlanta, GA | 877.512.6224  
 Atwater, CA | 800.829.9324  
 Ennis, TX | 800.653.6224

Indianapolis, IN | 800.735.6224  
 Lubbock, TX | 800.758.6224  
 Memphis, TN | 800.206.6224  
 Oklahoma City, OK | 800.597.6224  
 Phoenix, AZ | 888.533.6224

Rome, NY | 800.559.6224  
 Salt Lake City, UT | 800.874.2404  
 San Antonio, TX | 800.598.6224

